10.11.2026

loblicht GmbH - Zum Möhnewehr 9 - D-59755 Arnsberg-Neheim - info@loblicht.de - Telefon +49 (0) 2932-9784-0

300152

Toni 4506 U 24000 840 O SX DA

- light strip, universal
- linear
- aluminium





Tender

light strip, universal, linear, Luminaire body aluminium, Silver anodized (E6/EV1), anodizing, visible screws, direct beam distribution, covering opal, 4000 K, CRI 80, Rated Luminous Flux 24000 lm, Rated power 158 W, Luminous Efficiency 152 lm/W, Mac Adams 3, UGR < 28, Luminance ≥65° 16416 cd/m², average rated life L 80 B10 70.000 h (for ambient temperature 25°C), dimmable with integrated DALI control gear, electrical connection via 3 + 2-pole connection terminal up to 2.5mm², Mains voltage 230 V Net type 50/60 Hz, Glow wire strength 650°C, Protection class I, IP 40, Luminaire length 4506 mm, Luminaire width 45 mm, Height 74 mm, 6,2 kg.

Protection class	I
IP rating	IP 40

CE

Specifications

Rated Luminous Flux Φ_v:	24000 lm
Rated power P:	158 W
Color temperature T_{cp}:	4000 K
Luminance ≥ 65°:	16416 cd/m²
Average rated lifetime (Lx):	L 80 B10 70.000 h
Color rendering index CRI:	≥ 80
Luminous Efficiency η_v:	152 lm/W
UGR:	< 28

Dimensions & weight

Luminaire length:	4506 mm
Luminaire width:	45 mm
Height:	74 mm
Weight:	6,2 kg

Operating technology

Ambient temperature (ta):	25 °C
Mains voltage:	230 V
Net type (Hz):	50/60

Note

Required mounting accessories for Toni continuous-row lighting see:
Downloads -> Installation instructions

All technical data, weights and dimensions have been carefully compiled. Errors excepted. Product illustrations are examples and may differ from the original. We reserve the right to make changes in the interests of progress.
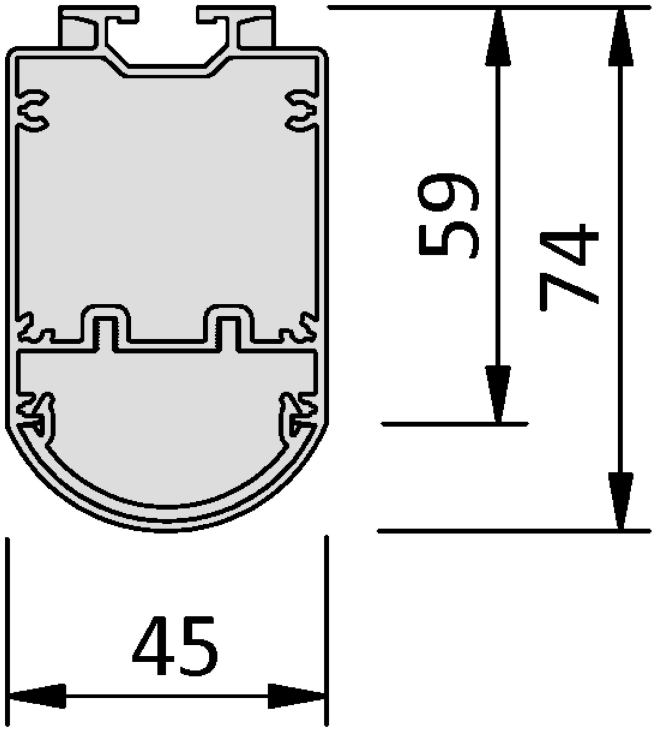
loblicht GmbH - Zum Möhnewehr 9 - D-59755 Arnsberg-Neheim - info@loblicht.de - Telefon +49 (0) 2932-9784-0