**loblicht** GmbH - Zum Möhnewehr 9 - D-59755 Arnsberg-Neheim - info@loblicht.de - Telefon +49 (0) 2932-9784-0

300150

# Toni 1506 U 8000 840 O SX DA

- light strip, universal
- linear
- aluminium






## Tender

light strip, universal, linear, Luminaire body aluminium, Silver anodized (E6/EV1), anodizing, visible screws, direct beam distribution, covering opal, 4000 K, CRI 80, Rated Luminous Flux 8000 lm, Rated power 55 W, Luminous Efficiency 145 lm/W, Mac Adams 3, UGR < 28, Luminance ≥65° 16416 cd/m², average rated life L 80 B10 70.000 h ( for ambient temperature 25°C), dimmable with integrated DALI control gear, electrical connection via 3 + 2-pole connection terminal up to 2.5mm², Mains voltage 230 V Net type 50/60 Hz, Glow wire strength 650°C, Protection class I, IP 40, Luminaire length 1506 mm, Luminaire width 45 mm, Height 74 mm, 2,3 kg.

| | |
|---|---|
| **Protection class** | I |
| **IP rating** | IP 40 |

CE

## Specifications

| | |
|---|---|
| Rated Luminous Flux $\Phi_v$: | 8000 lm |
| Rated power P: | 55 W |
| Color temperature $T_{cp}$: | 4000 K |
| Luminance ≥ 65°: | 16416 cd/m² |
| Average rated lifetime (Lx): | L 80 B10 70.000 h |
| Color rendering index CRI: | ≥ 80 |
| Luminous Efficiency $\eta_v$: | 145 lm/W |
| UGR: | < 28 |

## Dimensions & weight

| | |
|---|---|
| Luminaire length: | 1506 mm |
| Luminaire width: | 45 mm |
| Height: | 74 mm |
| Weight: | 2,3 kg |

## Operating technology

| | |
|---|---|
| Ambient temperature (ta): | 25 °C |
| Mains voltage: | 230 V |
| Net type (Hz): | 50/60 |

## Note

Required mounting accessories for Toni continuous-row lighting see:
Downloads -> Installation instructions

All technical data, weights and dimensions have been carefully compiled. Errors excepted. Product illustrations are examples and may differ from the original. We reserve the right to make changes in the interests of progress.
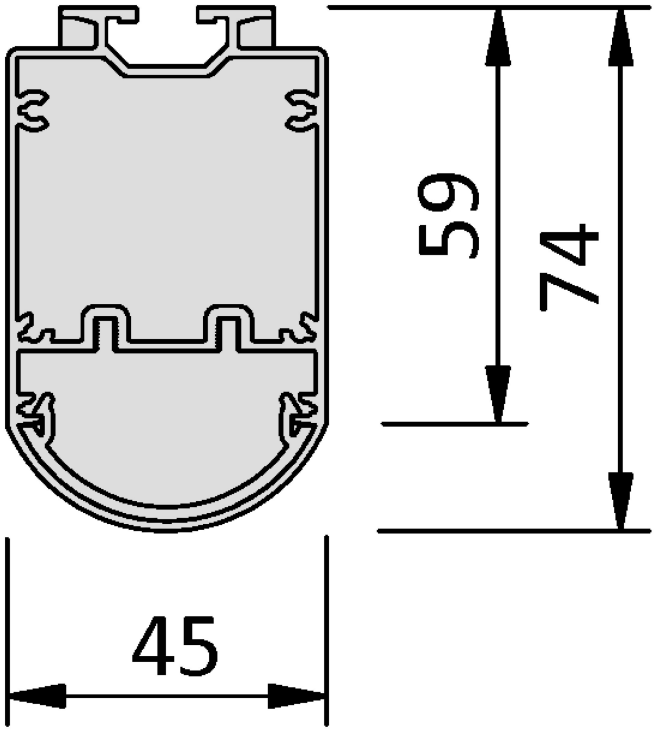
**loblicht** GmbH - Zum Möhnewehr 9 - D-59755 Arnsberg-Neheim - info@loblicht.de - Telefon +49 (0) 2932-9784-0