**loblicht** GmbH - Zum Möhnewehr 9 - D-59755 Arnsberg-Neheim - info@loblicht.de - Telefon +49 (0) 2932-9784-0

83410

# Hagen 600 SDI 13400 830 MT DB STD

- free-standing luminaire, direct/indirect
- rectangular, uniform illumination for ceiling brightening
- Extruded aluminum with reduced $CO_2$ footprint



## Tender

free-standing luminaire, direct/indirect, rectangular, Luminaire body sheet steel / aluminum, DB703, powder coating, direct/indirect beam distribution, uniform illumination for ceiling brightening, cover direct microprismatic indirect transparent, 3000 K, CRI 80, Rated Luminous Flux 13400 lm, Rated power 83 W, Luminous Efficiency 161 lm/W, Mac Adams 3, UGR < 13, Luminance ≥65° 301 cd/m², average rated life L 80 B10 70.000 h ( for ambient temperature 25°C), dimmable with integrated DALI control gear, Mains voltage 220-240 V Net type 50/60 Hz, Glow wire strength 650°C, Protection class I, IP 20, Leuchtensteurung Tageslicht- u. Präsenzsensor, Luminaire length 600 mm, Luminaire width 400 mm, Height 2025 mm, 14,5 kg.

| | |
|---|---|
| **Protection class** | I |
| **IP rating** | IP 20 |

CE

## Specifications

| | |
|---|---|
| Rated Luminous Flux $\Phi_v$: | 13400 lm |
| Rated power P: | 83 W |
| Color temperature $T_{cp}$: | 3000 K |
| Luminance ≥ 65°: | 301 cd/m² |
| Average rated lifetime (Lx): | L 80 B10 70.000 h |
| Color rendering index CRI: | ≥ 80 |
| Luminous Efficiency $\eta_v$: | 161 lm/W |
| UGR: | < 13 |

## Dimensions & weight

| | |
|---|---|
| Luminaire length: | 600 mm |
| Luminaire width: | 400 mm |
| Height: | 2025 mm |
| Weight: | 14,5 kg |

## Operating technology

| | |
|---|---|
| Ambient temperature (ta): | 25 °C |
| Mains voltage: | 220-240 V |
| Net type (Hz): | 50/60 |

## Note

824000 Connection cable Schuko/C13
3m black, is included in the scope of delivery.

All technical data, weights and dimensions have been carefully compiled. Errors excepted. Product illustrations are examples and may differ from the original. We reserve the right to make changes in the interests of progress.
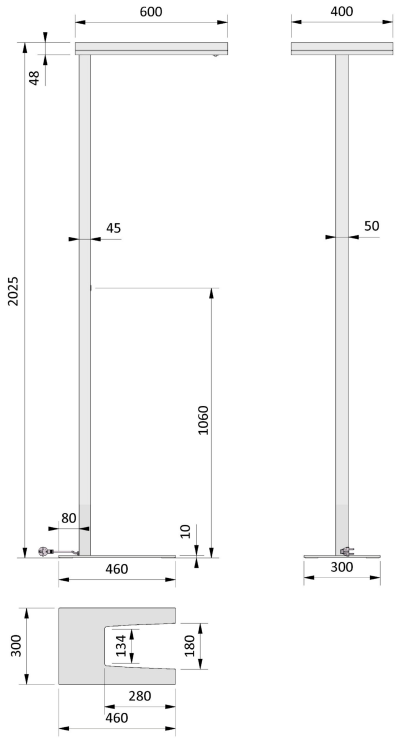
**loblicht** GmbH - Zum Möhnewehr 9 - D-59755 Arnsberg-Neheim - info@loblicht.de - Telefon +49 (0) 2932-9784-0