10.11.2026

loblicht GmbH - Zum Möhnewehr 9 - D-59755 Arnsberg-Neheim - info@loblicht.de - Telefon +49 (0) 2932-9784-0

83405

Hagen 600 SDI 14000 840 MT B STD

- free-standing luminaire, direct/indirect
- rectangular, uniform illumination for ceiling brightening
- Extruded aluminum with reduced CO_2 footprint



Tender

free-standing luminaire, direct/indirect, rectangular, Luminaire body sheet steel / aluminum, similar to RAL 9005, powder coating, direct/indirect beam distribution, uniform illumination for ceiling brightening, cover direct microprismatic indirect transparent, 4000 K, CRI 80, Rated Luminous Flux 14000 lm, Rated power 83 W, Luminous Efficiency 169 lm/W, Mac Adams 3, UGR < 13, Luminance ≥65° 317 cd/m², average rated life L 80 B10 70.000 h (for ambient temperature 25°C), dimmable with integrated DALI control gear, Mains voltage 220-240 V Net type 50/60 Hz, Glow wire strength 650°C, Protection class I, IP 20, Leuchtensteurung Tageslicht- u. Präsenzsensor, Luminaire length 600 mm, Luminaire width 400 mm, Height 2025 mm, 14,5 kg.

Protection class	I
IP rating	IP 20

CE

Specifications

Rated Luminous Flux Φ_v:	14000 lm
Rated power P:	83 W
Color temperature T_{cp}:	4000 K
Luminance ≥ 65°:	317 cd/m²
Average rated lifetime (Lx):	L 80 B10 70.000 h
Color rendering index CRI:	≥ 80
Luminous Efficiency η_v:	169 lm/W
UGR:	< 13

Dimensions & weight

Luminaire length:	600 mm
Luminaire width:	400 mm
Height:	2025 mm
Weight:	14,5 kg

Operating technology

Ambient temperature (ta):	25 °C
Mains voltage:	220-240 V
Net type (Hz):	50/60

Note

824000 Connection cable Schuko/C13
3m black, is included in the scope of delivery.

All technical data, weights and dimensions have been carefully compiled. Errors excepted. Product illustrations are examples and may differ from the original. We reserve the right to make changes in the interests of progress.
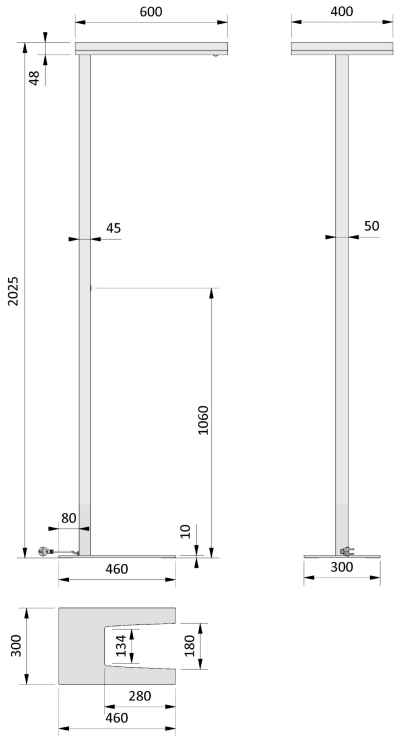
loblicht GmbH - Zum Möhnewehr 9 - D-59755 Arnsberg-Neheim - info@loblicht.de - Telefon +49 (0) 2932-9784-0